

**Mechanical characteristics**

cables  
  
interface dimensions acc. to assembly code  
center conductor  
outer conductor

**Components**

center contact  
outer contact  
other metal parts  
insulator  
gasket

**Electrical characteristics**

impedance  
voltage proof  
contact resistance  
center contact  
outer contact

**Environmental**

operating temp.  
RoHS compliant

**Mechanische Eigenschaften**

Kabel  
  
Steckgesicht nach Montageanleitung  
Innenleiter  
Außenleiter

**Bauteile**

Innenkontakt  
Außenkontakt  
sonstige Metallteile  
Isolierung  
Dichtung

**Elektrische Eigenschaften**

Wellenwiderstand  
Prüfspannung  
Durchgangswiderstand  
Innenkontakt  
Außenkontakt

**Umgebung**

Betriebstemperatur  
RoHS konform

G37: 2.7/7.3 AF, 2.7/7.3 CF, 213CRT7 Low Loss, 7810A, 9913, Aircom Premium, C2FCP, C2FP, CNT-400, EC 400, HPF 400, HPL 50-3XF-LSOH HFR, LMR-400, MRC 400 AFB, RF 400 TT, TZC 500 32, Speedfoam 400 HFJ, WBC-400, WCX400  
G42: 02Y(St)C(St)H 2.6/7.3 AF, 213RT5, 9914, H 1000, H 2000, RT 50/20  
G55: 9913F, MRC 400 Flex  
RG-213/U; RG-214/U

IEC 60169-12  
D11  
solder / löt  
clamp / klemm

**Materials / Material**

CuZn39Pb3  
CuZn39Pb3  
CuZn39Pb3  
PTFE  
NBR, silicone / Silikon

**Finish / Oberfläche**


Cu2Ag5  
Cu2Ni5  
Cu2Ni5, CuSnZn3, Cu2Ag5

~50 Ω  
2 kV<sub>eff</sub> / 50 Hz

≤ 5 mΩ  
≤ 5 mΩ

-30°C / +100°C  
2011/65/EU

M 1:1

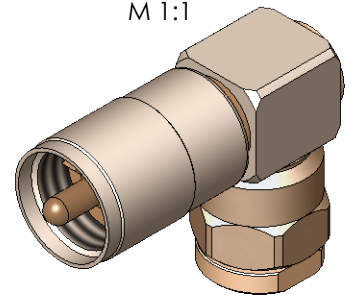

Änd./ rev. index	Änderungs-Nr. / revision code	Datum/ date	Name/ name	gez./ drawn	Datum/ date	Name/ name	Gewicht/ weight [g]
					11.08.2017	BJ	
				gepr./ appr.	06.11.2017	KL	ca./approx. 75
Maßstab/ scale				Benennung/ title			
2:1 (1:1)				UHF Angle Plug UHF-Kabelwinkelstecker			
untol. Maße/ dim. without tolerances according to				Untert./ doc. type		Zeichnungsnr./ drawing no.	
				K		J01040A0016	
				Ersatz für/ replaces			
				Maße/ dimensions: mm			
				Original : DIN A4			
				Blatt/ sheet 1 von/ of 1			